



FEATURES

- Industry's lower cost and deliver from stock.
- Exceptional long term stability.
- Exceeds carton comp MIL-R-11 performance
- Standard tolerance: $\pm 2\%$, $\pm 5\%$
- Variety of packing: Bulk , strip pack. 26mm and 52mm tape and reel

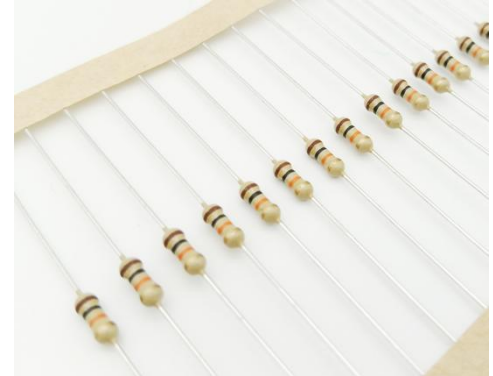

DRAWING and DIMENSIONS (mm)

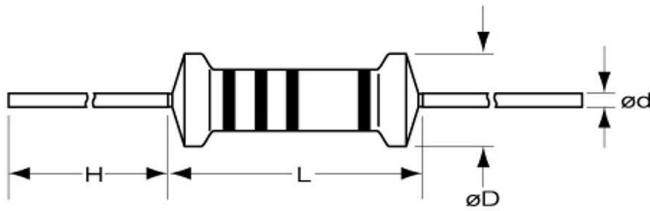

Series	Power Rating (Watt)	Dimension(mm)				Value Range
		L	ØD	H	Ød	
CF/CR	1/6W, 1/8W, 1/4WS	3.2±0.2	1.8±0.3	28±2	0.45±0.05	1Ω~10MΩ
CF/CR	1/4W, 1/2WS	6.0±0.2	2.3±0.3	26.5±2	0.50±0.05	1Ω~10MΩ
CF/CR	1/2W, 1WS	9.0±0.5	3.2±0.3	26±2	0.58±0.05	1Ω~10MΩ
CF/CR	1W, 2WS	11±0.5	4.5±0.5	35±2	0.68±0.05	1Ω~10MΩ
CF/CR	2W, 3WS	15±0.5	5.0±0.5	32.5±2	0.78±0.05	1Ω~10MΩ
CF/CR	3W, 5WS	17±0.5	6.0±0.5	32±2	0.78±0.05	1Ω~10MΩ

SPECIFICATIONS

Power Rating 70°C	1/6W, 1/8W, 1/4WS	1/4W, 1/2WS	1/2W, 1WS	1W, 2WS	2W, 3WS	3W, 5WS
Series Number	CF/CR					
Operating Temp. Range	-55°C ~ +155°C					
Max. Working Voltage	200V	300V	350V	500V	500V	600V
Max. Overload Voltage	400V	600V	700V	1000V	1000V	500V
Dielectric Withstanding Voltage(AC)	400V	500V	700V	1000V	1000V	1000V
Max. Intermittence Overload Voltage	500V	600V	700V	1000V	1000V	1000V
Temp. Coefficient (PPM/°C)	1/8W, 1/4W, 1/2W			1W, 2W, 3W		
	100KΩ Down +350/-500	100KΩ-1MΩ 0~ -700	1MΩ Up 0~ -1500	100KΩ Down +350~ -500	100KΩ-1MΩ 0~ -700	1MΩ Up 0~ -1500

FIG.1 DERATING CURVE


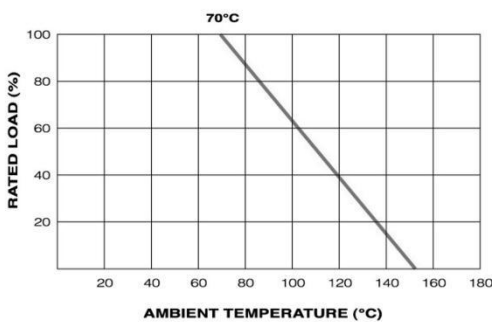


FIG.2 HOT-SPOT TEMPERATURE



Note: Other resistance is available on request. WEET is capable of doing custom service for you.

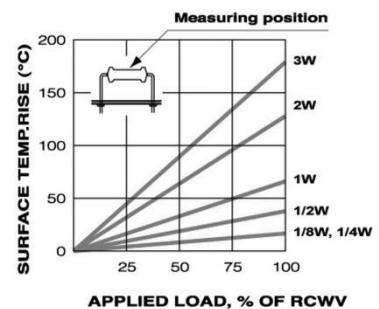

WEE Technology Company Limited
FLAT/RM 705, 7/F,
FA YUEN COMM BLDG NO.75,
FA YUEN STREET, MONG KOK, KL, HK
www.weetcap.com
info@weetcap.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

