


## FEATURES

- WMA is constructed with metallized polyester film as medium and electricode, wrapped and sealed with flame-retardant plastic and epoxy resin. With high reliability, high temperature-resistance, small volume, large capacity and good self-healing property.
- Mainly used in instruments and the DC & AC circuit of the household equipment and the fractional frequency circuit of acoustics system.

## DRAWING (mm)

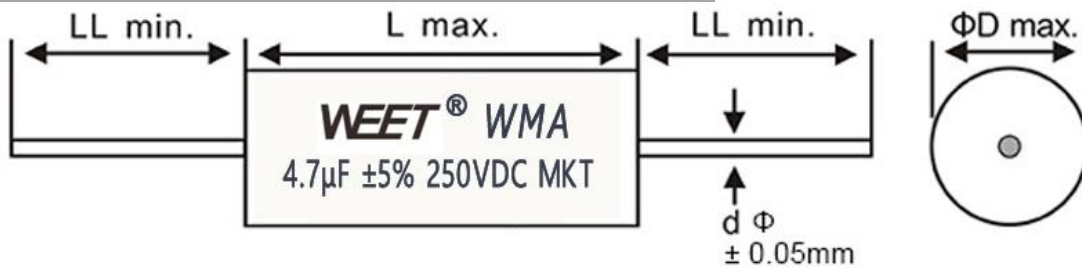

## PICTURE



## SPECIFICATIONS

Operating Temperature: -40°C ~ +105°C  
 Rated Voltage : 100V, 250V, 400V, 630V.DC  
 Withstand Voltage : 1.6UR 2s (1.5UR 5s)  
 Capacitance Range : 0.033 ~ 68μF  
 Capacitance Tolerance : ±5%, ±10%  
 Insulation Resistance : C≤0.33μF VR≤100V(10V)≥7500MΩ  
 VR>100V ≥15000 MΩ

Dissipation Factor	C<1μF	≤0.013 10KHz
	1μF<C≤10μF	≤0.008 1KHz
	C>10μF	≤0.010 1KHz

## SIZE TABLE (mm)

VDC		100VDC			250VDC			400VDC			630VDC		
Mfd		L	D	d	L	D	d	L	D	d	L	D	d
<b>333</b>	<b>0.033</b>	--	--	--	--	--	--	--	--		15.5	7.0	0.6
<b>473</b>	<b>0.047</b>	--	--	--	--	--	--	20.0	6.0	0.6	20.5	7.5	0.6
<b>683</b>	<b>0.068</b>	--	--	--	--	--	--	20.0	6.5	0.6	20.5	8.5	0.8
<b>104</b>	<b>0.1</b>	15.0	6.5	0.6	15.0	6.5	0.6	20.0	7.5	0.6	20.5	8.0	0.6
<b>224</b>	<b>0.22</b>	15.0	6.5	0.6	15.0	6.5	0.6	20.0	9.5	0.8	25.0	11.5	0.8
<b>334</b>	<b>0.33</b>	15.0	8.0	0.6	20.0	7.5	0.6	20.5	9.5	0.8	26.0	9.5	0.8
<b>474</b>	<b>0.47</b>	20.0	7.0	0.6	20.0	8.5	0.8	26.0	9.0	0.8	31.0	14.0	0.8
<b>684</b>	<b>0.68</b>	20.0	7.5	0.6	20.0	10.0	0.8	26.0	10.5	0.8	32.0	11.5	0.8
<b>105</b>	<b>1.0</b>	20.0	9.0	0.8	25.0	10.0	0.8	31.0	14.0	0.8	32.0	14.5	0.8
<b>225</b>	<b>2.2</b>	25.0	11.0	0.8	31.0	12.0	0.8	37.5	14.5	0.8	37.5	17.5	0.8
<b>335</b>	<b>3.3</b>	25.0	14.0	0.8	31.0	14.5	0.8	37.5	17.5	0.8	47.5	19.0	0.8
<b>475</b>	<b>4.7</b>	31.0	13.5	0.8	31.0	17.5	0.8	37.5	20.0	1.0	47.5	22.0	1.0
<b>565</b>	<b>5.6</b>	31.0	15.0	0.8	31.0	19.5	0.8	47.0	17.0	0.8	57.5	21.0	1.0
<b>685</b>	<b>6.8</b>	31.0	16.0	0.8	46.0	16.0	0.8	57.5	18.5	0.8	57.5	23.0	1.0
<b>825</b>	<b>8.2</b>	31.0	17.5	0.8	46.0	17.5	0.8	57.5	20.0	1.0	57.5	25.0	1.0
<b>106</b>	<b>10.0</b>	31.0	19.0	0.8	46.0	19.5	0.8	57.5	22.5	1.0	57.5	27.5	1.0
<b>156</b>	<b>15.0</b>	46.0	18.0	0.8	46.0	24.0	1.0	57.5	26.5	1.0	67.5	30.0	1.0
<b>226</b>	<b>22.0</b>	46.0	22.0	1.0	46.0	29.0	1.0	57.5	31.5	1.0	--	--	--
<b>336</b>	<b>33.0</b>	56.0	23.5	1.0	56.0	30.0	1.0	--	--	--	--	--	--
<b>476</b>	<b>47.0</b>	56.0	29.0	1.0	58.0	37.0	1.0	--	--	--	--	--	--
<b>686</b>	<b>68.0</b>	58.0	33.0	1.0	61.0	41.0	1.0	--	--	--	--	--	--

**Note: Other Values are available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
ROOM 1405, 14/F, LUCKY CENTRE,  
171 WANCHAI ROAD,  
WANCHAI, HONG KONG  
[www.musicaps.com](http://www.musicaps.com)  
[sales@musicaps.com](mailto:sales@musicaps.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

